


NBD80S16S-KL

16ch 4K H.265 NVR Board


Feature:

- Support access of multiple XM smart front-end devices with human detection and face detection function.
- Support HDMI 4K, VGA 1080P HD output;
- Support ONVIF;access third party;
- Support web, CMS, center platform management software MYEYE, provide SDK development;
- Support multiple cloud technology, network penetration, alarm information pushed to your phone and other functions;
- Support multiple network services (support DHCP, FTP, DNS, DDNS, NTP, UPNP, EMAIL, IP searches, Alarm Center, etc.);
- Support GB28181 protocol access to third-party platform

Parameters:

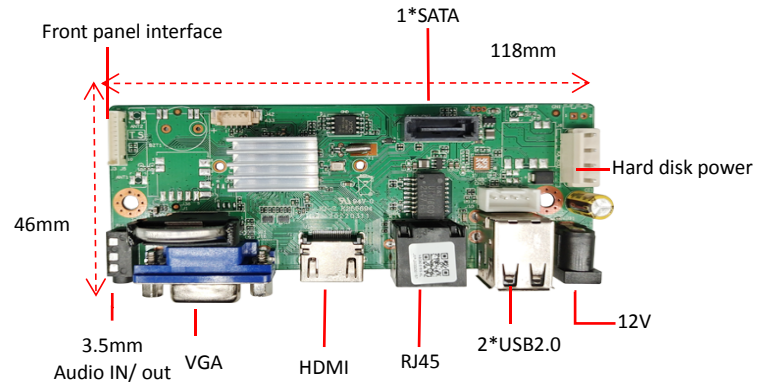

	Model	NBD80S16S-KL
System	Operating System	Embedded Linux
	System resources	Simultaneous multi-channel real-time recording, playback, network operation, USB backup
Interface	Operator interface	16-bit true color graphic menu operation interface, support mouse operation
	Preview	1/2/4/6/8/9/16
Video	Video input (IP)	16*4K
	Video compression	H.265A/H.265+(compatible H.265/H.264)
	Display quality	Max:4K
	Playback quality	4K/5M/4M/3M/1080P
	Decode	4K (1) /5M (1+1) /4M(2+1)/3M (2+2) /1080P (4+1)
	VR	Unsupport
	human shape / Face	Support(depend on camera)
Audio	Audio compression	G.711A
	Intercom	support
Record & playback	Recording mode	Manual>Alarm>Dynamic Detection>Timing
	Local payback	4K (1) /5M (1+1) /4M(2+1)/3M (2+2) /1080P (4+1)
	Search mode	Search by Time/Calendar/Event/Channel/Face
	Record storage	HDD、Network、Cloud
	Backup mode	Network backup, USB hard disk, USB burner, SATA burner
External interface	Video output	1ch VGA, 1ch HDMI HD output
	Audio I/O	1/1 (3.5mm)
	Alarm I/O	0/0
	Network interface	1*RJ45 10M/100M Adaptive Ethernet port
	USB interface	2*USB2.0 ports(one USB extension interface is reserved)
	HDD	1* SATA(Up to 6TB for each disk)
	ESATA	No
	Serial interface	No
Other	ONVIF	Support
	Power supply	12V/2A
	Power Consumption	<10W(Without HDD)
	Work environment	Temperature:0℃ —55℃ , Humidity:10%—90%RH , Atm:86kpa—106kp
	Dimension	118mm*46mm
	Weight	A total of about 47g

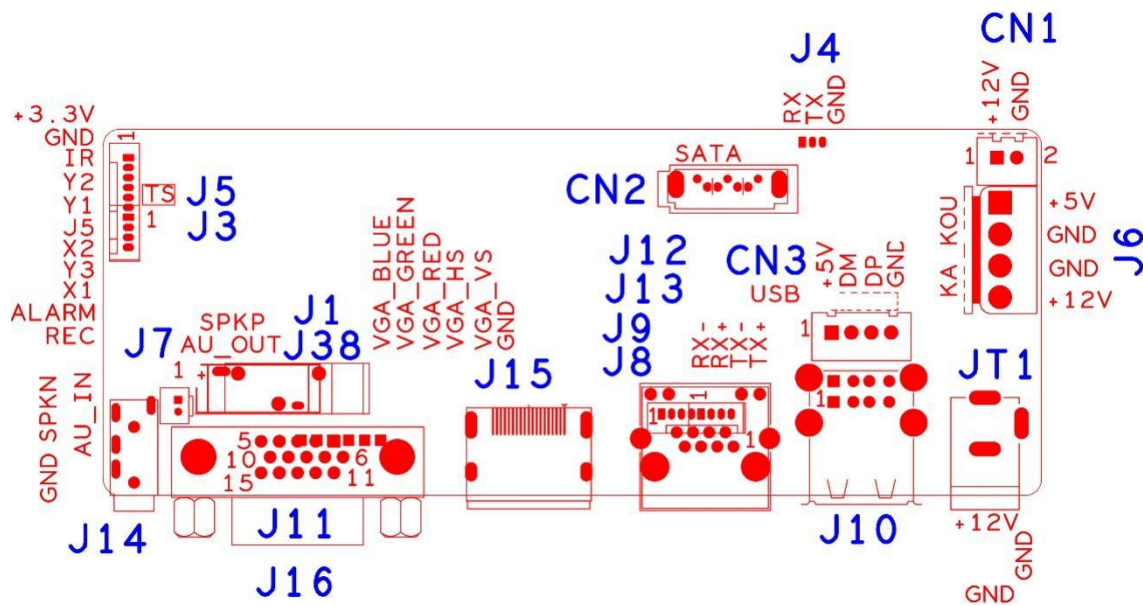

sign	Function	Interface Description			
J1	CR2032 Battery holder				
CN2	SATA				
J3/J5	10Pin front panel interface(1.25*10P)	1:+3.3	2:GND	3:IR	4:COL2
		5:COL1	6:ROW2	7:COL3	8:ROW1
		9:ALARM	10:REC		
J4	RS232				
J6	SATA power extension socket	1:+5	2:GND	3:GND	4:+12
CN1	Fan seat	1:+12	2:GND		
JT1	12V input				
J10	2*USB				
CN3	USB Extension interface	1:+5	2:USB_DM	3:USB_DP	4:GND
J13	RJ45				
J8	Poe Extension interface				
J15	HDMI				
J16	VGA				
J11	VGA Extension interface				
J14	3.5mm Audio In/Output interface				
J7	Speaker Extension interface				